



TYPE
'SP'

self-priming pumps



- SELF-PRIMING
- CENTRIFUGAL
- MAXIMUM EFFICIENCY
- SIMPLE, TROUBLE-FREE CONSTRUCTION
- COMPLETE RANGE OF SIZES:
Capacities to 400 G.P.M.
Heads to 180 Feet
- CHOICE OF DRIVING ARRANGEMENTS:
Flexible-coupled motor drive (standard)
Close-coupled motor drive
Belted motor drive
Gas engine drive
Diesel engine drive
Steam turbine drive
- 1750 TO 3450 R.P.M. OPERATION
- ECONOMICAL INSTALLATION
- SIMPLE MAINTENANCE
- NO FOOT VALVE REQUIRED

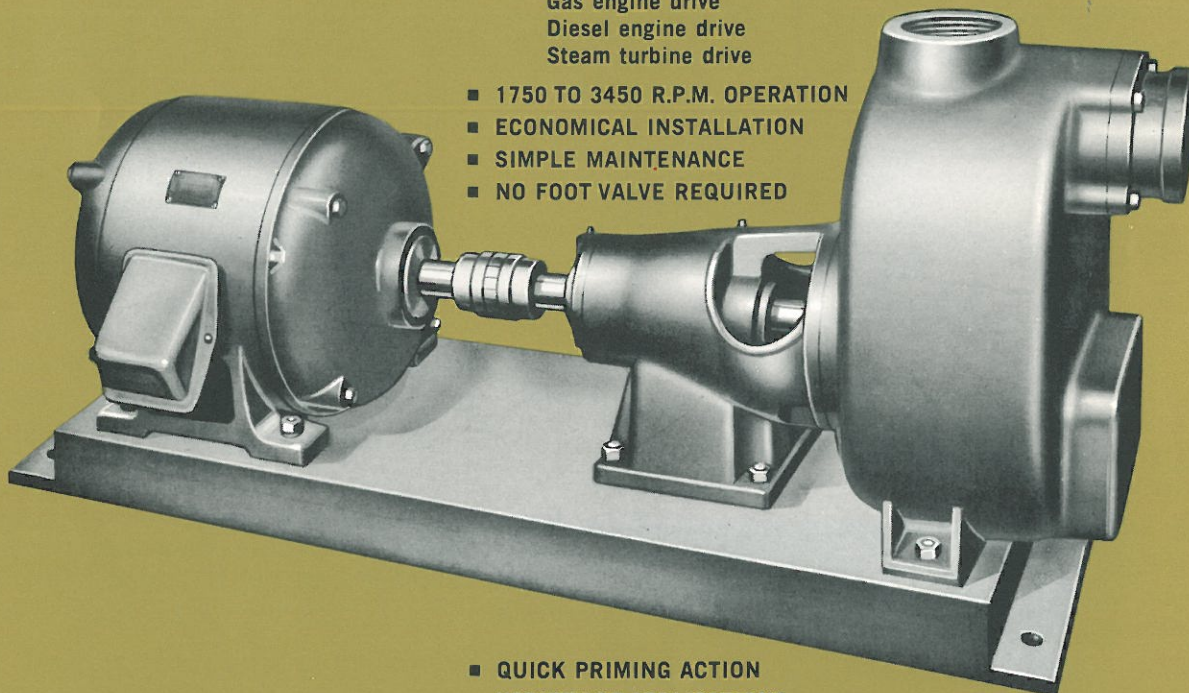

- QUICK PRIMING ACTION
- VARIETY OF APPLICATIONS:
Sump service • Effluent service • Swimming
pools • Process applications • Contractors'
pumps • Portable pumps • Marine
applications • Home utility pump
- LIGHT WEIGHT
- AUTOMATIC WEAR COMPENSATION
- COMPLETE FACTORY ASSEMBLY
- STARTING EQUIPMENT AVAILABLE
- PIT COVERS AND ACCESSORIES AVAILABLE

ESTABLISHED 1927



FEDERAL PUMP CORPORATION

1144 UTICA AVENUE • BROOKLYN 3, N. Y.