
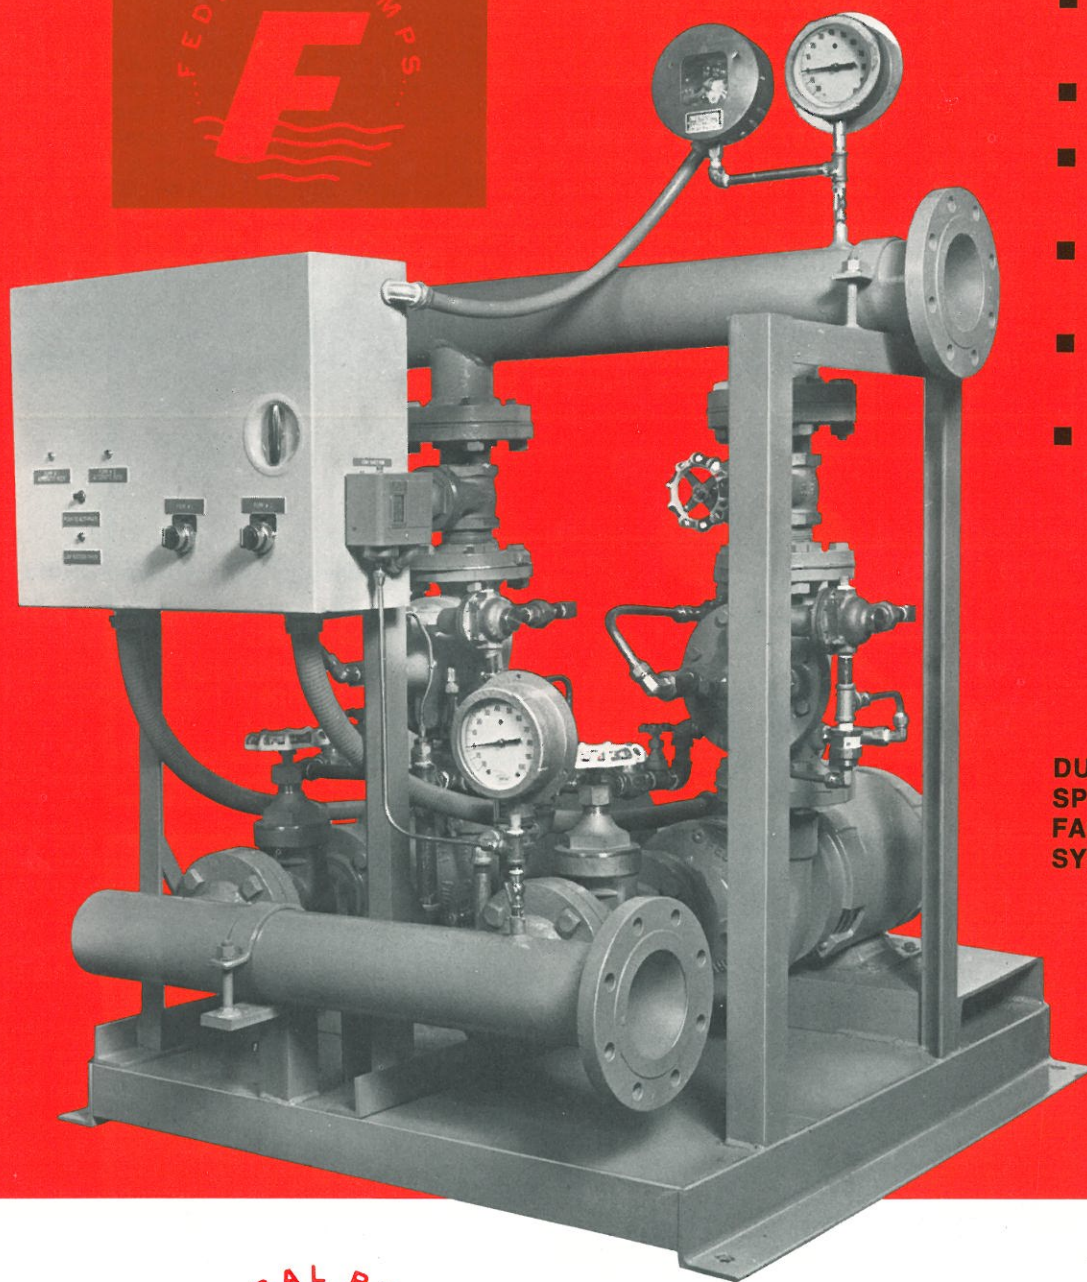


TYPE
SP-PR
 UNASSEMBLED
SP-PR-FA
 FACTORY ASSEMBLED

PRESSURE-SENSING SET-PRESSURE SYSTEMS



- Automatic maintenance of building water pressure
- SP-PR Systems for field assembly
- SP-PR-FA Systems factory assembled and wired
- Standard constant speed pump and motor units used
- Simplex, Duplex and Triplex Systems available
- Cushion-stop control available for low demand periods

**DUPLEX
 SP-PR-FA
 FACTORY ASSEMBLED
 SYSTEM**

ESTABLISHED 1927



FEDERAL PUMP CORPORATION

1144 UTICA AVENUE • BROOKLYN, N. Y. 11203